

HDB3200CP

TANDER®

2Mp CMOS Full HD Vandal-proof Network Mini Dome Camera




Model

HDB3200CP: 2.0 Megapixel CMOS, 25fps@1080P, 2.8mm/3.6mm lens, PoE, IK10, IP66

Features

- 1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS image sensor
- High-performance TI DaVinci series DSP
- H.264 video compression and JPEG image capture
- Max 25/30fps@1080P resolution
- Dual encoding streams supported
- Built-in 2.8mm/3.6mm/6mm/8mm lens
- Max 32GB Micro SD card for local storage
- Support DC12V power supply, PoE
- IK10-rated Vandal-proof & IP66 Water-proof
-

Dimensions (mm)

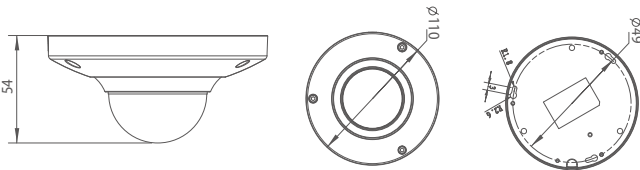

Specifications

Model	HDB3200CP
General	
Processor	TI DaVinci Series DSP
Operating System	Embedded LINUX
Resource	Simultaneous remote monitoring, local recording and remote control
User Interface	WEB, CMS(DSS/ PSS), DMSS, NVR
Camera	
Image Sensor	1/3" 2.0 Megapixel SONY progressive scan Exmor CMOS
Effective Pixels	1920 (H)×1080(V)
Electronic Shutter	Auto/Manual, 1/3~1/10000s
Mini. Illumination	0.2LUX/F1.6(Color), 0.01LUX/F1.6(B/W)
Signal Noise Ratio	>50dB
Gain Control	Auto/Manual
White Balance	Auto/Manual
Day/Night	Electronic
Lens Mount	M12
Lens	2.8mm/3.6mm/6mm/8mm optional
Video	
Video Compression	H.264/MJPEG
Image Resolution	1080P(1920×1080) / 720P(1280×720) / D1(704×576) / CIF(352×288)
Encoding Speed	1080P/720P(1~25fps) + D1(1~25fps)
Bit Rate	160K~8Mbps
Snapshot	Fastest 1fps JPEG capture
Network	
Ethernet	RJ-45 (10/100Base-T)
Network Functions	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF
Remote Operation	Monitor, Playback, System setting, File download, Log information, Maintenance & Upgrade
Auxiliary Interface	
MicroSD Card	Max 32GB, local storage
Environmental	
Power Supply	DC12V, PoE
Power Consumption	<4W
Ingress Protection	IK10 & IP66
Operating Environment	-10°C~+60°C, 10%~90%
Dimension	Φ110mm×54mm
Weight	500g