

HFW2100P

TANDÉR®

1.3Mp (720P) HD IP66 Weather-proof IR Mini Network Camera




Model

HFW3110P : 1.3 Megapixel (720P),
12/15fps@1.3M(1280×960), 25/30fps@720P resolution

Features

- 1.3 Megapixel CMOS Sensor
- High-performance TI DaVinci series DSP
- H.264 video compression and JPEG image capture
- 12/15fps@1.3M(1280×960), 25/30fps@720P resolution
- Dual encoding streams supported
- Support ICR true Day/Night
- Max. IR distance: 15/20 Meter
- Lens: 3.6mm (6.0mm available)
- IP66 Weather Proof
- Support DC12V power supply, PoE

Dimensions (mm)

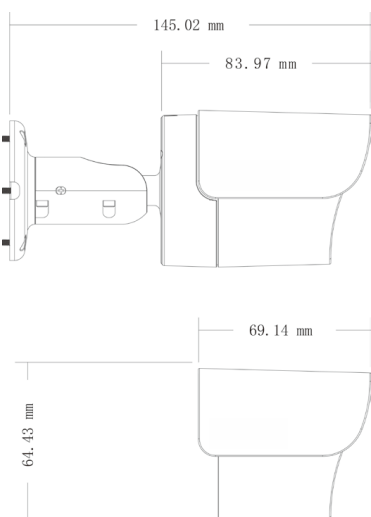

Specifications

Model	HFW 2110P
General	
Processor	TI DaVinci Series DSP
Operating System	Embedded LINUX
Resource	Simultaneous remote monitoring, local recording and remote control
User Interface	WEB, CMS(DSS/ PSS), DMSS, NVR
Camera	
Image Sensor	1/3" 1.3 Megapixel SONY progressive scan CCD
Effective Pixels	1280 (H)×960(V)
Electronic Shutter	Auto/Manual, 1/3~1/10000s
Mini. Illumination	0.2LUX/F1.2(Color), 0.05LUX/F1.2(B/W), 0LUX IR ON
Signal Noise Ratio	>50dB
Gain Control	Auto/Manual
White Balance	Auto/Manual
Day/Night	ICR
Lens Mount	M12
Lens	3.6mm (6.0mm available)
Video	
Video Compression	H.264/MJPEG
Image Resolution	1.3M(1280×960) / 720P(1280×720) / D1(704×576/704×480)
Encoding Speed	1.3M (1~12fps) + D1(1~12fps) 720P(1~25fps) + D1(1~25fps)
Bit Rate	128K~8192Kbps
Snapshot	Fastest 1fps JPEG capture
Video Format	PAL
Network	
Ethernet	RJ-45 (10/100Base-T)
Network Functions	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, UDP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF
Remote Operation	Monitor, PTZ control, Playback, System setting, File download, Log information, Maintenance & Upgrade
Environmental	
Power Supply	DC12V, PoE
Power Consumption	Max. 4W
Operating Environment	-10°C~+50°C, 10%~90%
Dimension	64.43mm×145.02mm
Max. IR Distance	15-20 Meter
Ingress Protection	IP66 Outdoor Weather Proof